



afk | garden

# AFK ARBOUR ASSEMBLY INSTUCTIONS

Use Instructions for  
Cottage Arbours  
Mandarin Arbour  
Pavilion Arbour  
Goodwood Arbour

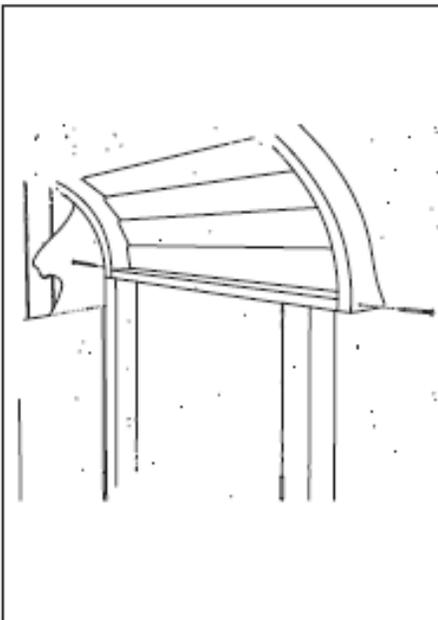


Lift the roof assembly into place and screw to uprights at each corner using the 60mm screws. Please do not overtighten screws.

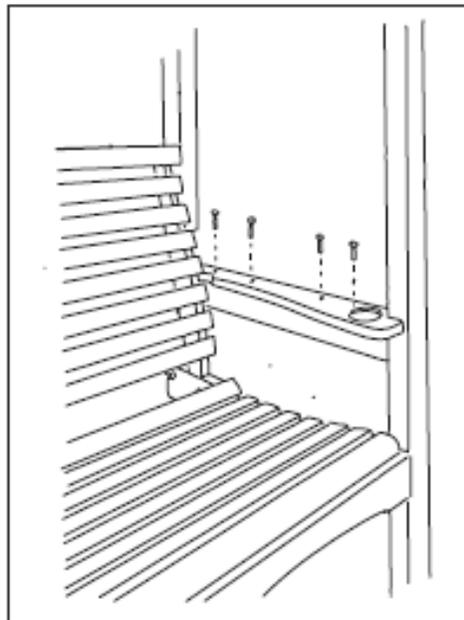

Fit the armrests with the 40mm screws.

Note Mandarin & Pavilion have a support bracket that fits with 40mm & 80mm screws.

Goodwood Arbour does not have armrests.

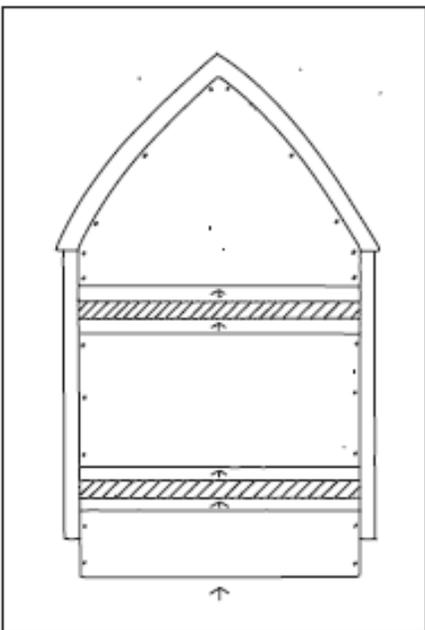

Finally, locate the back panels into the grooves in the cross-members as shown. Start at the top and screw into place as you progress down. Use 18mm flat head screw.



Note The Mandarin arbour has 4 panels and 3 cross-member to fit

A top quality paint/ stain has been used in the manufacture of this arbour.  
To maintain this factory finish we recommend the arbour should be re-painted/ stained annually with genuine AFK garden furniture paint/ stain.


[www.afkgardenfurniture.co.uk](http://www.afkgardenfurniture.co.uk)

(version 2015)



Carefully follow these instructions for easy and accurate assembly of your Arbour. To aid identification, the fixing components are illustrated on the right. We recommend the use of a cordless screwdriver and adjustable spanner in the assembly which is best done by two people.

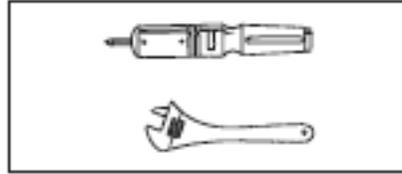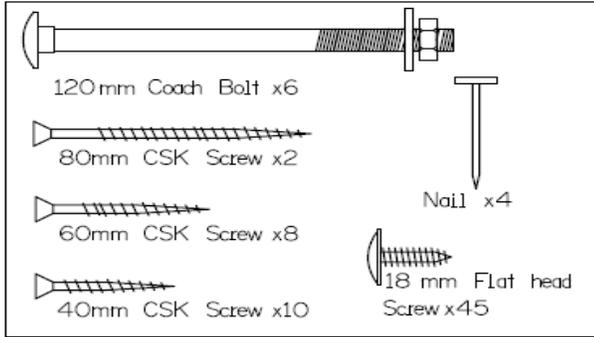


Begin assembling your Arbour by positioning the two roof sections as shown, making sure they butt-up accurately. Check that the rebated edges of the arch are at the same end. Screw the retaining plate into position on the inside of the arch using the 18mm flat head screws as illustrated. Very carefully, turn the roof assembly over and repeat the operation with the other retaining plate.

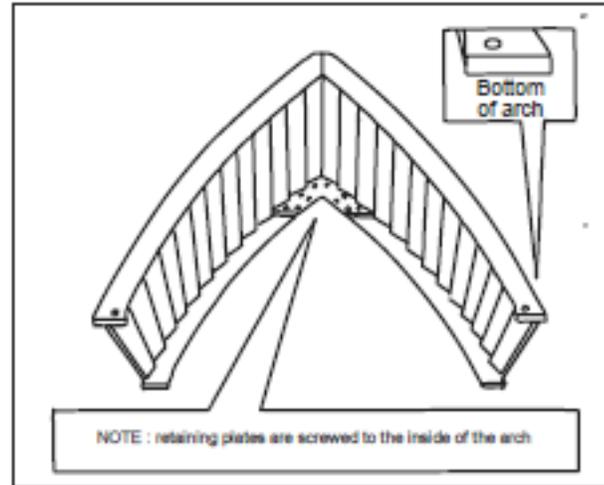

Screw the upper back panel into the rebated edge end using the 18mm flat head screws. Then nail the ridge-piece into position.

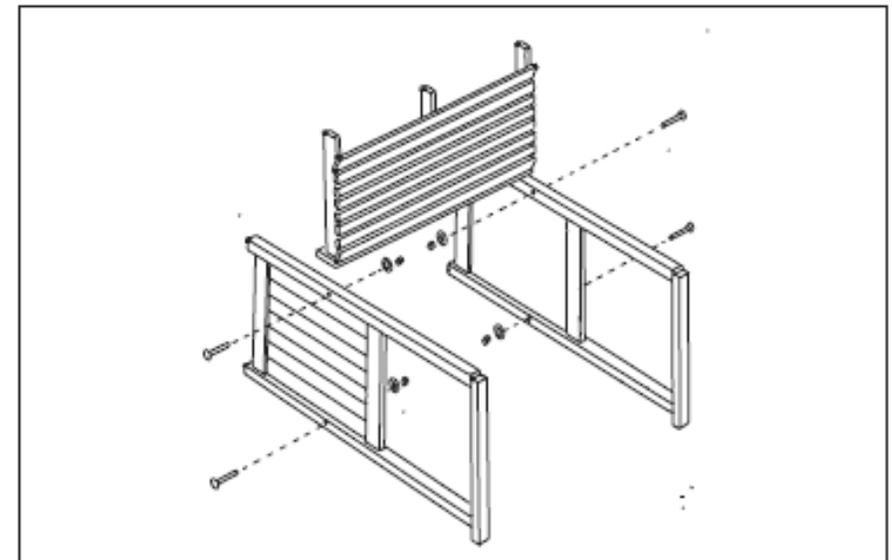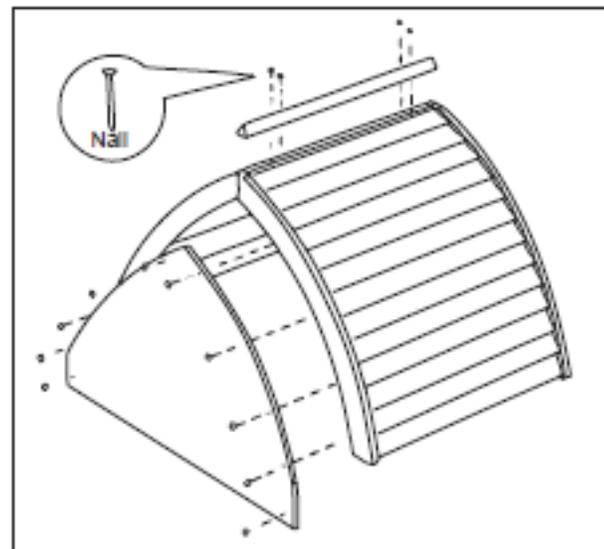

Now place the sides on the ground in the position shown. Lower the seat base into its location with the front edge of the seat on the ground. Secure in place with a coach-bolt at each corner.

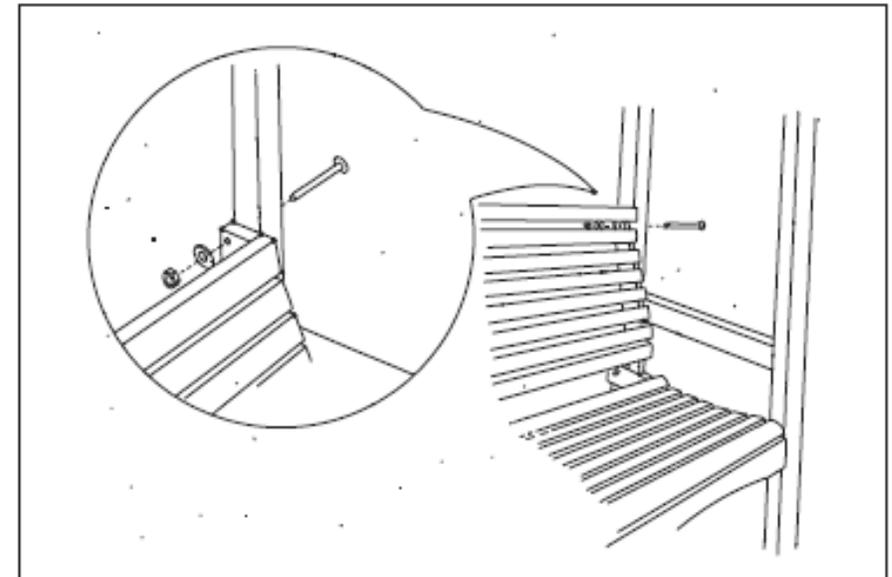

Carefully stand the seat and sides upright - this is best done by two people. Locate the back-rest into position and coach-bolt into place through the rear uprights.